© Siemens AG 2017

Overview

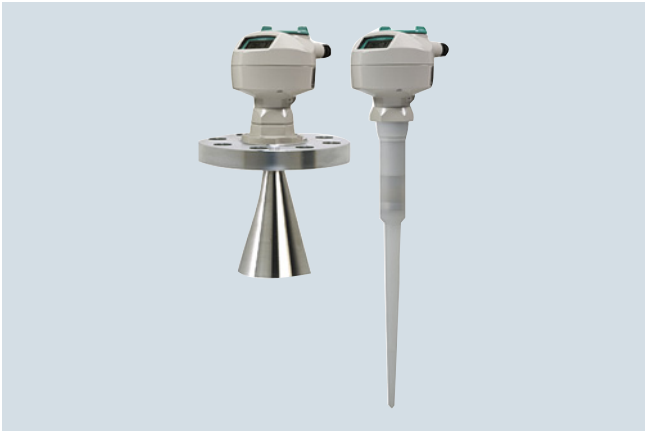

SITRANS LR200 is a 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature, pressure, agitation, and turbulence to a range of 20 m (65 ft).

Benefits

- Graphical local user interface (LUI) makes operation simple with plug-and-play setup using the intuitive Quick Start Wizard
- LUI displays echo profiles for diagnostic support
- Communication using HART or PROFIBUS PA
- Process Intelligence signal processing for improved measurement reliability and Auto False-Echo Suppression of fixed obstructions
- Programming using infrared Intrinsically Safe handheld programmer or SIMATIC PDM

Application

SITRANS LR200's unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid. It also features a built-in alphanumeric display in four languages.

The SITRANS LR200 has a standard Uni-Construction polypropylene rod antenna that offers excellent chemical resistance and is hermetically sealed. The Uni-Construction antenna features an internal, integrated shield that eliminates vessel nozzle interference.

Startup is easy with as few as two parameters for basic operation. Installation is simplified as the electronics are mounted on a rotating head that swivels, allowing the instrument to line up with conduit or wiring connections or simply to adjust the position for easy viewing. SITRANS LR200 features Process Intelligence signal-processing technology for superior reliability.

- Key Applications: liquid process vessels with agitators, vaporous liquids, high temperatures, asphalt, digesters

Configuration

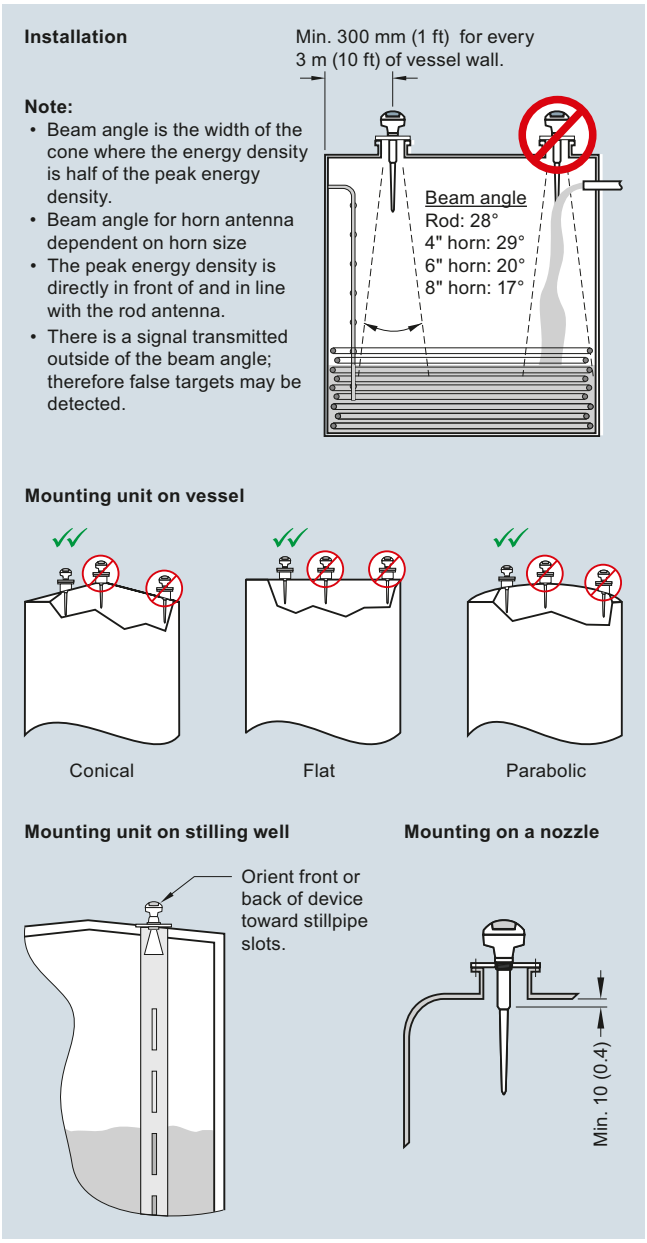

SITRANS LR200 installation, dimensions in mm (inch)

© Siemens AG 2017

Technical specifications

Mode of operation	
Measuring principle	Radar level measurement
Frequency	5.8 GHz (North America 6.3 GHz)
Measuring range	0.3 ... 20 m (1.0 ... 65 ft)
Output	
Analog output	4 ... 20 mA
Accuracy	± 0.02 mA
Span	Proportional or inversely proportional
Communications	HART Optional: PROFIBUS PA (Profile 3.0, Class B)
Fail-safe	Programmable as high, low or hold (Loss of Echo)
Performance (according to reference conditions IEC60770-1)	
From end of antenna to 600 mm	40 mm (1.57 inch)
Remainder of range	10 mm (0.4 inch) or 0.1 % of span (whichever is greater)
Rated operating conditions	
Installation conditions	
• Location	Indoor/outdoor
Ambient conditions (enclosure)	
• Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)
• Installation category	I
• Pollution degree	4
Medium conditions	
Dielectric constant ε_r	$\varepsilon_r > 1.6$ (for $\varepsilon_r < 3$, use stillpipe)
Vessel temperature and pressure	Varies with connection type; see Pressure/Temperature curves for more information
Design	
Enclosure	
• Material	Aluminum, polyester powder coated
• Cable inlet	2 x M20 x 1.5 or 2 x ½" NPT
Degree of protection	Type 4X/NEMA 4X, Type 6/ NEMA 6, IP67, IP68
Weight	< 2.82 kg (6.21 lb) (polypropylene rod antenna)
Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages
Antenna	
• Material	Polypropylene rod, hermetically sealed construction, optional PTFE
• Dimensions	Standard 100 mm (4 inch) shield for maximum 100 mm (4 inch) nozzle, or optional 250 mm (10 inch) long shield
• Optional rods and horn	Refer to SITRANS LR200 Antennas for optional rods and horns
Process connections	
• Process connection	1½" NPT [(Taper), ANSI/ASME B1.20.1] R 1½" [(BSPT), EN 10226], or G 1½" [(BSPP), EN ISO 228-1] (polypropylene rod antenna)
• Flange connection	Refer to SITRANS LR200 Antennas for more connections

Power supply	
4 ... 20 mA/HART	
• General Purpose, Non-incendive, Intrinsically Safe	Nominal 24 V DC (max. 30 V DC) with max. 550 Ω
• Flame proof, Increased safety, Explosion proof	Nominal 24 V DC (max. 30 V DC) with max. 250 Ω
PROFIBUS PA	• 10.5 mA • Per IEC 61158-2
Certificates and approvals	
General	$CSA_{US/C}$, CE, FM, RCM
Marine	• Lloyd's Register of Shipping • ABS Type Approval
Radio	FCC, Industry Canada, and European (R&TTE), RCM
Hazardous	
• Intrinsically Safe (Brazil)	INMETRO Ex ia IIC T4 Ga
• Explosion Proof (Canada/USA)	CSA/FM, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III, T4
• Intrinsically Safe (Canada/USA)	CSA/FM, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III, T4
• Non-incendive (USA)	FM, Class I, Div. 2, Groups A, B, C, D, T5
• Flame Proof/Increased Safety (China)	NEPSI Ex d mb ia IIC T4/ Ex e mb ia IIC T4
• Flame Proof (Europe)	ATEX II 1/2 G Ex d mb ia IIC T4 Ga/Gb
• Increased Safety (Europe)	ATEX II 1/2 G Ex e mb ia IIC T4 Ga/Gb
• Intrinsically Safe (Europe)	ATEX II 1G Ex ia IIC T4
• Intrinsically Safe (International)	IECEx Ex ia IIC T4
• Intrinsically Safe (Russia/Kazakhstan)	EAC Ex ia
Programming	
Intrinsically Safe Siemens handheld programmer	Infrared receiver
• Approvals for handheld programmer	IS model: ATEX II 1GD Ex ia IIC T4 Ga Ex iaD 20 T135 °C T_a = -20 ... +50 °C CSA/FM Class I, II, and III, Div. 1, Groups A, B, C, D, E, F, G, T6 T_a = +50 °C
Handheld communicator	HART communicator 375
PC	• SIMATIC PDM • AMS • SITRANS DTM (for connecting to FDT such as PACTware or Fieldcare)
Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages

© Siemens AG 2017

Selection and Ordering data	Article No.
SITRANS LR200, Uni-Construction polypropylene rod antenna version ↗	**7ML5422-**
	■■■■ **0**
2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).	
Max. 3 bar g (43.5 psi g) pressure and 80 °C (176 °F)	
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
Enclosure/Cable inlet	
Aluminum, epoxy painted	
2 x ½" NPT	**2**
2 x M20 x 1.5	**3**
Polypropylene antenna type - (Max. 3 Bar pressure and 80 °C)	
1½" NPT [(Taper), ANSI/ASME B1.20.1], c/w integral 100 mm shield	**A**
R 1½" [(BSPT), EN 10226], c/w integral 100 mm shield	**B**
G 1½" [(BSPP), EN ISO 228-1], c/w integral 100 mm shield	**C**
1½" NPT [(Taper), ANSI/ASME B1.20.1], c/w integral 250 mm shield	**D**
R 1½" [(BSPT), EN 10226], c/w integral 250 mm shield	**E**
G 1½" [(BSPP), EN ISO 228-1], c/w integral 250 mm shield	**F**
Approvals	
General Purpose, CE, R&TTE, RCM	**A**
General Purpose, CSA, FM, Industry Canada, FCC	**B**
Intrinsically Safe, CSA Class I, II, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada	**C**
Intrinsically Safe, FM Class I, II, Div. 1, Groups A, B, C, D, E, F, G, FCC	**D**
Intrinsically Safe, IECEx/ATEX II 1G Ex ia IIC T4, INMETRO Ex ia IIC T4, CE, R&TTE, RCM; EAC	**E**
Non incendive, FM Class I, Div. 2, Groups A, B, C, D, FCC[1]	**F**
Increased Safety, ATEX II 1/2G Ex e mb ia IIC T4 Ga/Gb, CE, R&TTE, RCM; EAC[2][3]	**G**
Flame Proof, ATEX II 1/2G Ex d mb ia IIC T4 Ga/Gb, CE, R&TTE, RCM; EAC[3]	**H**
Explosion Proof, CSA/FM Class I, II, III, Groups A, B, C, D, E, F, G, Industry Canada, FCC[1][3]	**J**
Communication/Output	
PROFIBUS PA	**2**
4 ... 20 mA, HART, start-up at < 3.6 mA	**3**

[1] Available with enclosure option 2 only

[2] Available with enclosure option 3 only

[3] Available with communication option 3 only

Selection and Ordering data	Order code
Further designs	
Please add "**-Z**" to Article No. and specify Order code(s).	
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text	**Y15**
Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000	**C11**
Namur NE43 compliant, device preset to failsafe < 3.6 mA[1]	**N07**
Operating Instructions for PROFIBUS PA device	Article No.
English	**A5E32337680**
German	**A5E34942820**
Note: The Operating Instructions should be ordered as a separate item on the order.	
All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	
Accessories	
Handheld programmer, Intrinsically safe, EEx ia	**7ML1930-1BK**
HART modem/USB (for use with a PC and SIMATIC PDM)	**7MF4997-1DB**
One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART[2]	**7ML1930-1AP**
One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA[2]	**7ML1930-1AQ**
One general purpose polymeric cable gland M20 x 1.5, rated -20 ... + 80 °C (-40 ... +176 °F)	**7ML1930-1AM**
SITRANS RD100, loop powered display - see Chapter 7	**7ML5741-...**
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	**7ML5740-...**
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	**7ML5744-...**
SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7	**7ML5750-...**
For applicable back up point level switch - see point level measurement section	

[1] Available with communication option 3 only

[2] Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended.

© Siemens AG 2017

SITRANS LR200

Selection and Ordering data	Article No.
SITRANS LR200, Flange Adapter/PTFE Rod Antenna Version ↗	**7ML5423-**
2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).	
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
Antenna material (uses antenna adapter)	
PTFE, uses antenna adapter and additional process connection below	1
Process connection (refer to Pressure/Temperature curves, page 4/199)	
Flanges (316L stainless steel)	
DN 50 PN 16, Type A, flat faced	A A
DN 80 PN 16, Type A, flat faced	B A
DN 100 PN 16, Type A, flat faced	C A
DN 150 PN 16, Type A, flat faced	D A
2" ASME 150 lb, flat faced	F B
3" ASME 150 lb, flat faced	G B
4" ASME 150 lb, flat faced	H B
6" ASME 150 lb, flat faced	J B
DN 50 PN 40, flat faced	A C
DN 80 PN 40, flat faced	B C
DN 100 PN 40, flat faced	C C
DN 150 PN 40, flat faced	D C
2" ASME 300 lb, flat faced, available with Pressure rating option 1 only due to flange hole spacing	F D
3" ASME 300 lb, flat faced	G D
4" ASME 300 lb, flat faced	H D
6" ASME 300 lb, flat faced	J D
JIS DN 50 10K	A E
JIS DN 80 10K	B E
JIS DN 100 10K	C E
JIS DN 150 10K (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5, or EN 1092-1, or JIS B 2220 standard.)	D E
Threaded connection (316L stainless steel)	
1½" NPT [(Taper), ANSI/ASME B1.20.1]	L A
2" NPT [(Taper), ANSI/ASME B1.20.1]	M A
R 1½" [(BSPT), EN 10226]	L C
R 2" [(BSPT), EN 10226]	M C
G 1½" [(BSPP), EN ISO 228-1]	L E
G 2" [(BSPP), EN ISO 228-1]	M E
Antenna extensions or Inactive shield length	
No antenna extension	0
50 mm (2 inch) extension, PTFE	1
100 mm (4 inch) extension, PTFE	2
100 mm (4 inch) extension, 316L stainless steel shield[1)]	3
150 mm (6 inch) extension, 316L stainless steel shield[1)]	4
200 mm (8 inch) extension, 316L stainless steel shield[1)]	5
250 mm (10 inch) extension, 316L stainless steel shield[1)]	6
Process seal/gasket	
Integral Gasket, for flat faced flange process connections only, not for Antenna extension options 3 ... 6	0
FKM O-ring, not available for combination of flat faced flanges with Antenna extension options 0, 1 or 2	1

Selection and Ordering data	Article No.
SITRANS LR200, Flange Adapter/PTFE Rod Antenna Version	**7ML5423-**
2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).	
Enclosure/Cable inlet	
Aluminum, Epoxy painted	
2 x ½" NPT	2
2 x M20 x 1.5	3
Communication/Output	
PROFIBUS PA	B
4 ... 20 mA, HART, start-up at < 3.6 mA	C
Approvals	
General Purpose, CE, R&TTE, RCM	A
General Purpose, CSA, FM, Industry Canada, FCC	B
Intrinsically Safe, CSA Class I, II, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada	C
Intrinsically Safe, FM Class I, II, Div. 1, Groups A, B, C, D, E, F, G, FCC	D
Intrinsically Safe, IECEx/ATEX II 1G Ex ia IIC T4, INMETRO Ex ia IIC T4, CE, R&TTE, RCM; EAC	E
Non incendive, FM Class I, Div. 2, Groups A, B, C, D, FCC[2)]	F
Increased Safety, ATEX II 1/2G Ex e mb ia IIC T4 Ga/Gb, CE, R&TTE, RCM; EAC [3)4)]	G
Flame Proof, ATEX II 1/2G Ex d mb ia IIC T4 Ga/Gb, CE, R&TTE, RCM; EAC[4)]	H
Explosion Proof, CSA/FM Class I, II, III, Groups A, B, C, D, E, F, G, Industry Canada, FCC[2)4)]	J
Pressure rating	
Rating per Pressure/Temperature curves in manual	0
0.5 bar g (7.25 psi g) maximum	1

1) Available with process connection options BA, CA, DA, GB, HB, JB, BC, CC, DC, GD, HD, JD, BE, CE, DE, MA, MC, ME only

2) Available with enclosure option 2 only

3) Available with enclosure option 3 only

4) Available with communication option C only

© Siemens AG 2017

Selection and Ordering data	Order code
Further designs	
Please add "**-Z**" to Article No. and specify Order code(s).	
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text	**Y15**
Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000	**C11**
Material inspection Certificate Type 3.1 per EN 10204	**C12**
Namur NE43 compliant, device preset to failsafe < 3.6 mA[3)]	**N07**
Operating Instructions for PROFIBUS PA device	Article No.
English	**A5E32337680**
German	**A5E34942820**
Note: The Operating Instructions should be ordered as a separate item on the order.	
All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	
Accessories	
Handheld programmer, Intrinsically safe, EEx ia	**7ML1930-1BK**
Antenna, rod, PTFE	**7ML1830-1HC**
Antenna extension, 50 mm (2 inch), PTFE	**7ML1830-1CH**
Antenna extension, 100 mm (4 inch), PTFE	**7ML1830-1CG**
HART modem / USB (for use with PC and SIMATIC PDM)	**7MF4997-1DB**
Metallic cable gland M20 x 1.5, rated -40 °C (-40 °F) ... 80 °C (176 °F), HART (two are required)	**7ML1930-1AP**
Metallic cable gland M20 x 1.5, rated -40 °C (-40 °F) ... 80 °C (176 °F), PROFIBUS PA (two required)	**7ML1930-1AQ**
One General Purpose polymeric cable gland M20 x 1.5, rating for -20 °C (-4°F) ...+ 80 °C (176 °F)	**7ML1930-1AM**
SITRANS RD100, loop powered display - see Chapter 7	**7ML5741-...**
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	**7ML5740-...**
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	**7ML5744-...**
SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7	**7ML5750-...**
For applicable back up point level switch - see point level measurement section	

© Siemens AG 2017

SITRANS LR200

Selection and Ordering data	Article No.
SITRANS LR200, Flange adapter/Horn Antenna version	**7ML5425-**
2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).	
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
Antenna material (uses antenna adapter)	
316L stainless steel with PTFE cone emitter	0
316L stainless steel with PTFE cone emitter and purge connection with 1/8" NPT inlet[1]	1
Sliding waveguide system with 1 000 mm (40 inch) waveguide[1)2)]	2
Process connection (refer to Pressure/Temperature curves, page 4/199)	
Flanges (316L stainless steel)	
DN 50 PN 16 EN 1092-1 Type A flat faced[1)]	A A
DN 80 PN 16 EN 1092-1 Type A flat faced	B A
DN 100 PN 16 EN 1092-1 Type A flat faced	C A
DN 150 PN 16 EN 1092-1 Type A flat faced	D A
DN 200 PN 16 EN 1092-1 Type A flat faced	E A
DN 80 PN 10/16 DIN EN 1092-1 Type B1 raised face[3)]	B F
DN 100 PN 10/16 DIN EN 1092-1 Type B1 raised face[3)]	C F
DN 150 PN 10/16 DIN EN 1092-1 Type B1 raised face[3)]	D F
DN 200 PN 16 DIN EN 1092-1 Type B1 raised face[3)]	E F
2" ASME 150 lb, flat faced[1)]	F B
3" ASME 150 lb, flat faced	G B
4" ASME 150 lb, flat faced	H B
6" ASME 150 lb, flat faced	J B
8" ASME 150 lb, flat faced	K B
DN 50 PN 40, flat faced[3)]	A C
DN 80 PN 40, flat faced[3)]	B C
DN 100 PN 40, flat faced[3)]	C C
DN 80 PN 25/40 DIN EN 1092-1 Type B1 raised face[3)]	C G
DN 100 PN 25/40 DIN EN 1092-1 Type B1 raised face[3)]	D G
DN 150 PN 25/40 DIN EN 1092-1 Type B1 raised face[3)]	E G
2" ASME 300 lb, flat faced[1)3)]	F D
3" ASME 300 lb, flat faced[3)]	G D
4" ASME 300 lb, flat faced[3)]	H D
JIS DN 50 10K[1)]	A E
JIS DN 80 10K	B E
JIS DN 100 10K	C E
JIS DN 150 10K	D E
JIS DN 200 10K	E E
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5, or EN 1092-1, or JIS B 2220 standard.)	
Communication/Output	
PROFIBUS PA	1
4 ... 20 mA, HART, start-up at < 3.6 mA	2

Selection and Ordering data	Article No.
SITRANS LR200, Flange adapter/Horn Antenna version	**7ML5425-**
2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).	
Process seal/gasket	
FKM (-40 ... +200 °C)	0
Nitrile (-40 ... +60 °C), sliding waveguide systems only	1
FFKM (-35 ... +200 °C)	2
Enclosure/Cable inlet	
Aluminum, Epoxy painted	
2 x ½" NPT	2
2 x M20 x 1.5	3
Horn size/Waveguide options	
80 mm (3 inch) horn[4)]	B
100 mm (4 inch) horn[4)]	C
150 mm (6 inch) horn	D
200 mm (8 inch) horn	E
100 mm (4 inch) horn with 100 mm (4 inch) waveguide extension[4)]	F
100 mm (4 inch) horn with 150 mm (6 inch) waveguide extension[4)]	G
100 mm (4 inch) horn with 200 mm (8 inch) wave-guide extension[4)]	H
100 mm (4 inch) horn with 250 mm (10 inch) waveguide extension[4)]	J
150 mm (6 inch) horn with 100 mm (4 inch) waveguide extension	K
150 mm (6 inch) horn with 150 mm (6 inch) waveguide extension	L
150 mm (6 inch) horn with 200 mm (8 inch) waveguide extension	M
150 mm (6 inch) horn with 250 mm (10 inch) waveguide extension	N
200 mm (8 inch) horn with 100 mm (4 inch) waveguide extension	P
200 mm (8 inch) horn with 150 mm (6 inch) waveguide extension	Q
200 mm (8 inch) horn with 200 mm (8 inch) waveguide extension	R
200 mm (8 inch) horn with 250 mm (10 inch) waveguide extension	S

© Siemens AG 2017

Selection and Ordering data	Article No.
SITRANS LR200, Flange adapter/Horn Antenna version	**7ML5425-**
2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature and pressure, to a range of 20 m (66 ft).	-
Approvals	
General Purpose, CE, R&TTE, RCM	**A**
General Purpose, CSA, FM, Industry Canada, FCC	**B**
Intrinsically Safe, CSA Class I, II, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada	**C**
Intrinsically Safe, FM Class I, II, Div. 1, Groups A, B, C, D, E, F, G, FCC	**D**
Intrinsically Safe, IECEx/ATEX II 1G Ex ia IIC T4, INMETRO Ex ia IIC T4, CE, R&TTE, RCM; EAC	**E**
Non incendive, FM Class I, Div. 2, Groups A, B, C, D, FCC[5]	**F**
Increased Safety, ATEX II 1/2G Ex e mb ia IIC T4 Ga/Gb, CE, R&TTE, RCM; EAC[6][7]	**G**
Flame Proof, ATEX II 1/2G Ex d mb ia IIC T4 Ga/Gb, CE, R&TTE, RCM; EAC[7]	**H**
Explosion Proof, CSA/FM Class I, II, III, Groups A, B, C, D, E, F, G, Industry Canada, FCC[5][7]	**J**
Pressure rating	
Rating per Pressure/Temperature curves in manual 0.5 bar g (7.25 psi g) maximum	**0**
	1

[1] Available with pressure rating option 1 only

[2] Maximum Process Temperature 60 °C (140 °F)

[3] Available with Antenna Material options 0 and 1 only

[4] For stillpipe applications only

[5] Available with enclosure option 2 only

[6] Available with enclosure option 3 only

[7] Available with communication option 2 only

Selection and Ordering data	Order code
Further designs	
Please add "**-Z**" to Article No. and specify Order code(s).	
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text	**Y15**
Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000	**C11**
Material inspection Certificate Type 3.1 per EN 10204	**C12**
Namur NE43 compliant, device preset to failsafe < 3.6 mA[1]	**N07**
Operating Instructions for PROFIBUS PA device	Article No.
English	**A5E32337680**
German	**A5E34942820**
Note: The Operating Instructions should be ordered as a separate item on the order.	
All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	
Accessories	
Handheld programmer, Intrinsically safe, EEx ia	**7ML1930-1BK**
HART modem/USB (for use with a PC and SIMATIC PDM)	**7MF4997-1DB**
One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART[2]	**7ML1930-1AP**
One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA[3]	**7ML1930-1AQ**
One general purpose polymeric cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F)	**7ML1930-1AM**
SITRANS RD100, loop powered display - see Chapter 7	**7ML5741-...**
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	**7ML5740-...**
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	**7ML5744-...**
SITRANS RD500 web, universal remote monitoring solution for instrumentation - see Chapter 7	**7ML5750-...**
For applicable back up point level switch - see point level measurement section	

[1] Available with communication option 2 only

[2] Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended.

[3] Available with enclosure option 2 only

© Siemens AG 2017

4

Dimensional drawings

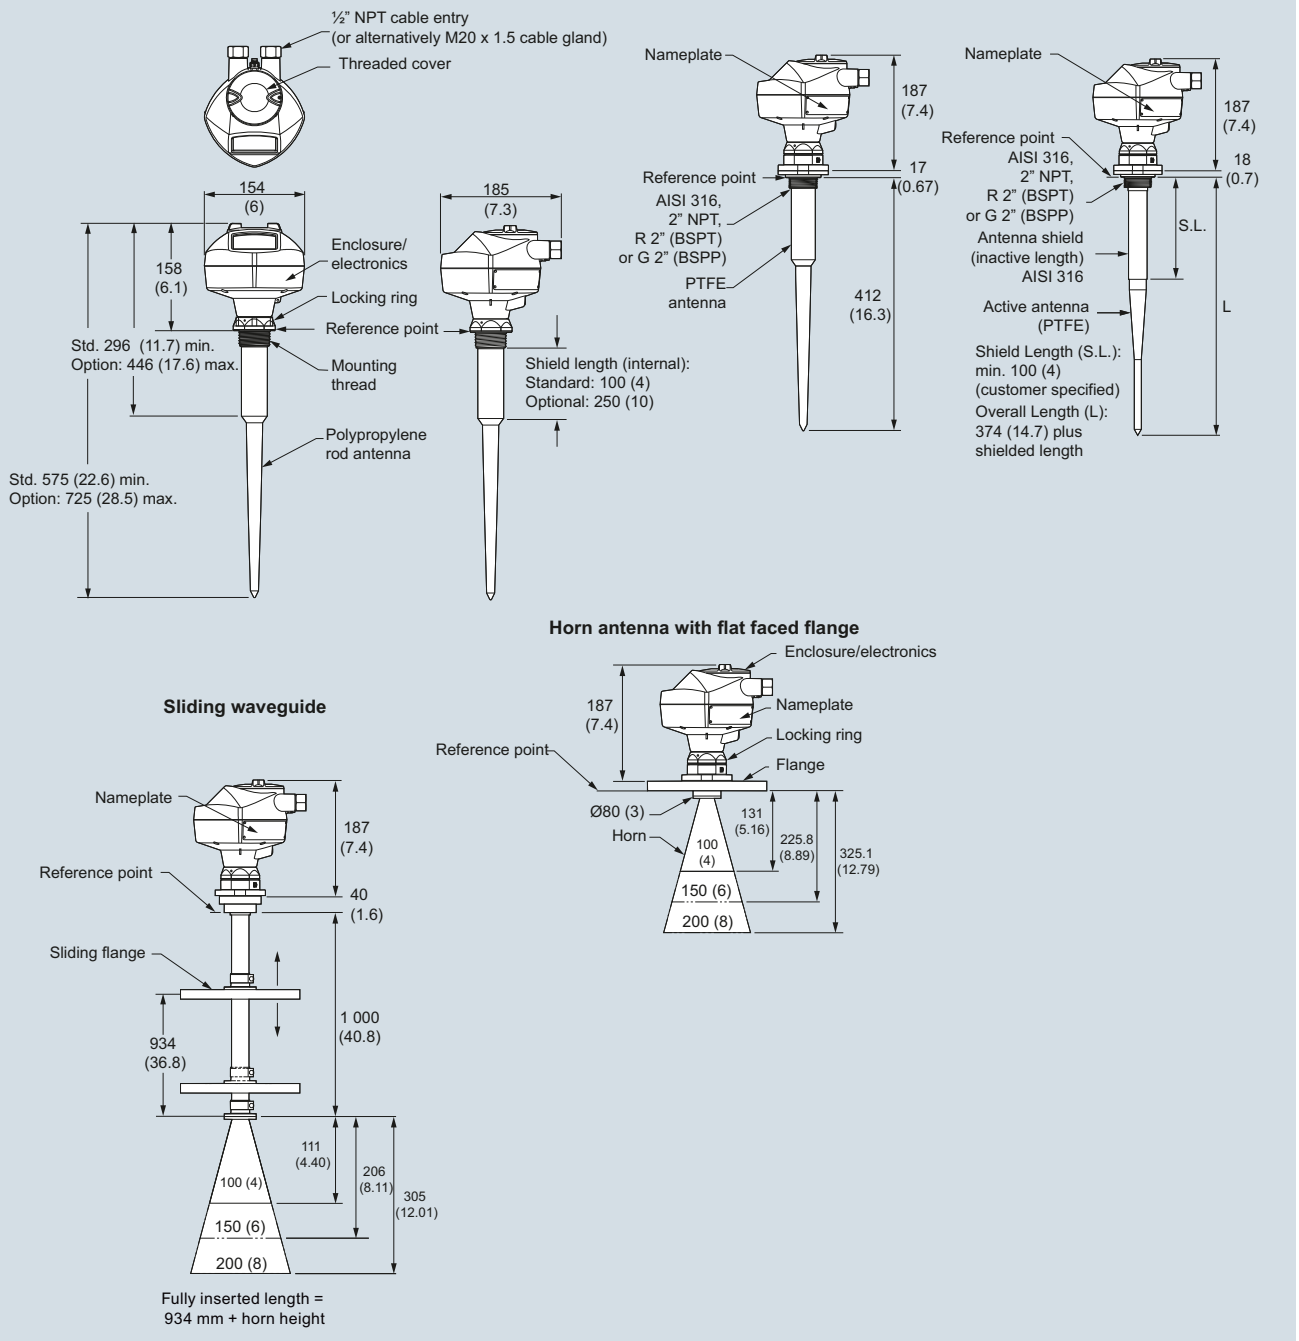

SITRANS LR200, dimensions in mm (inch)

© Siemens AG 2017

Schematics

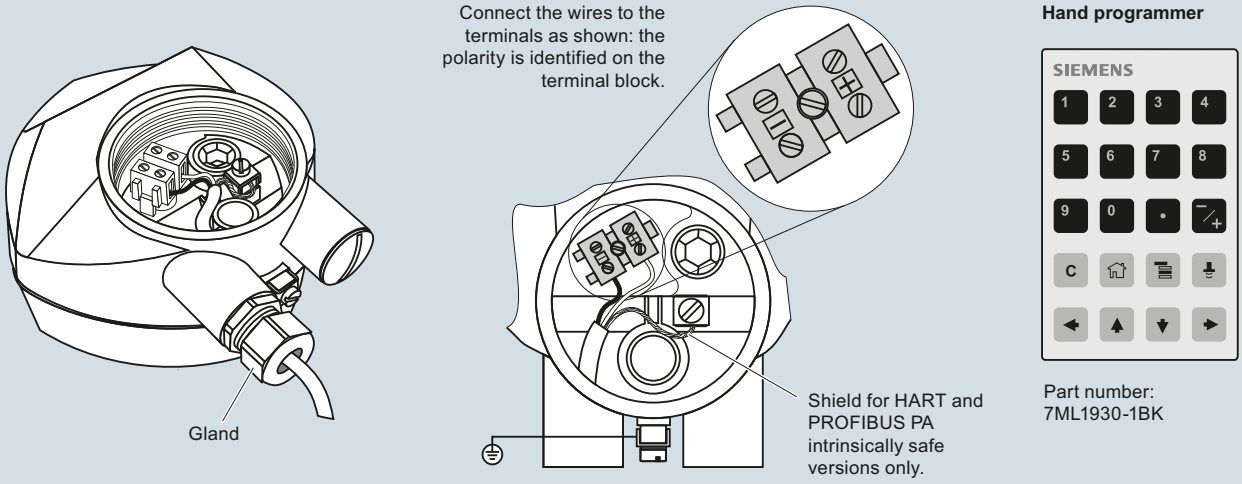

Notes:

1. DC terminal shall be supplied from an SELV source in accordance with IEC 1010-1 Annex H.
2. All field wiring must have insulation suitable for rated input voltages.
3. Use shielded twisted pair cable (14 ... 22 AWG) for HART version.
4. Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

SITRANS LR200 connections

© Siemens AG 2017

4

Integration

Sliding waveguide antenna, typically for digester applications that include an isolation valve between the instrument and the vessel.

Horn with waveguide extension. Used for high temperature isolation, long standpipes, and clearing tank obstructions.

SITRANS LR200 with flange adapter for connection to optional antennas.

Flat faced flange connection with PTFE rod antenna.

Shielded rod antenna with a stainless steel shield eliminates standpipe interference. Various lengths available.

Antenna configurations for SITRANS LR200

Technical specifications

Antenna types	Flat Faced Flange with Rod	Shielded Rod	Horn (4", 6", 8" sizes available)
Connection type	Flat faced flange nominal pipe sizes 50, 80, 100, 150 mm (2, 3, 4, 6 inch)	Threaded 2" NPT, R 2" (BSPT), G 2" (BSPP) or flat faced flangenominal pipe sizes 80, 100 mm (3, 4 inch)	Flat faced flangenominal pipe sizes 50, 80, 100, 150 mm (2, 3, 4, 6 inch)
Wetted parts	PTFE	PTFE, 316L stainless steel, FKM O-ring	316L stainless steel PTFE, FKM O-ring
Extensions	50 or 100 mm (2 or 4 inch) PTFE or UHMW-PE	100, 150, 200 or 250 mm (4, 6, 8 or 10 inch) standard shield length	Use waveguide for extensions to 6 m (20 ft) long
Dielectric constant	> 3	> 3	> 3
Insertion length (max.)	41 cm (16.3 inch)	Variable	Variable with extension
Purging option (liquid or gas)	No	No	Yes
Sliding waveguide option for digesters[1]	Yes	No	Yes
Weight[2]	6.5 kg (14.3 lb)	5.0 kg (11 lb)	7.5 kg (16.5 lb)

1) Maximum pressure 0.5 bar g at 60 °C (7.25 psi g at 140 °F)
2) Not including extensions, includes SITRANS LR200 and smallest process connection

© Siemens AG 2017

Characteristic curves

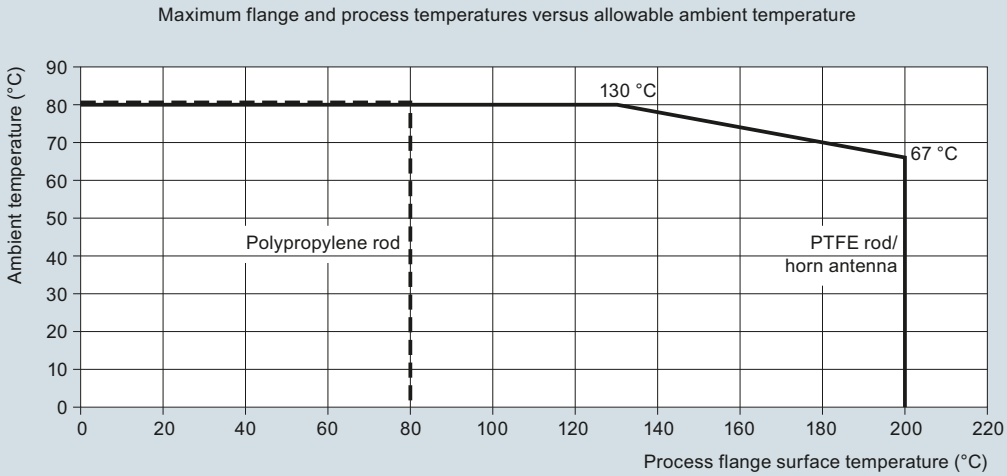

SITRANS LR200 ambient/process flange surface temperature curve

© Siemens AG 2017

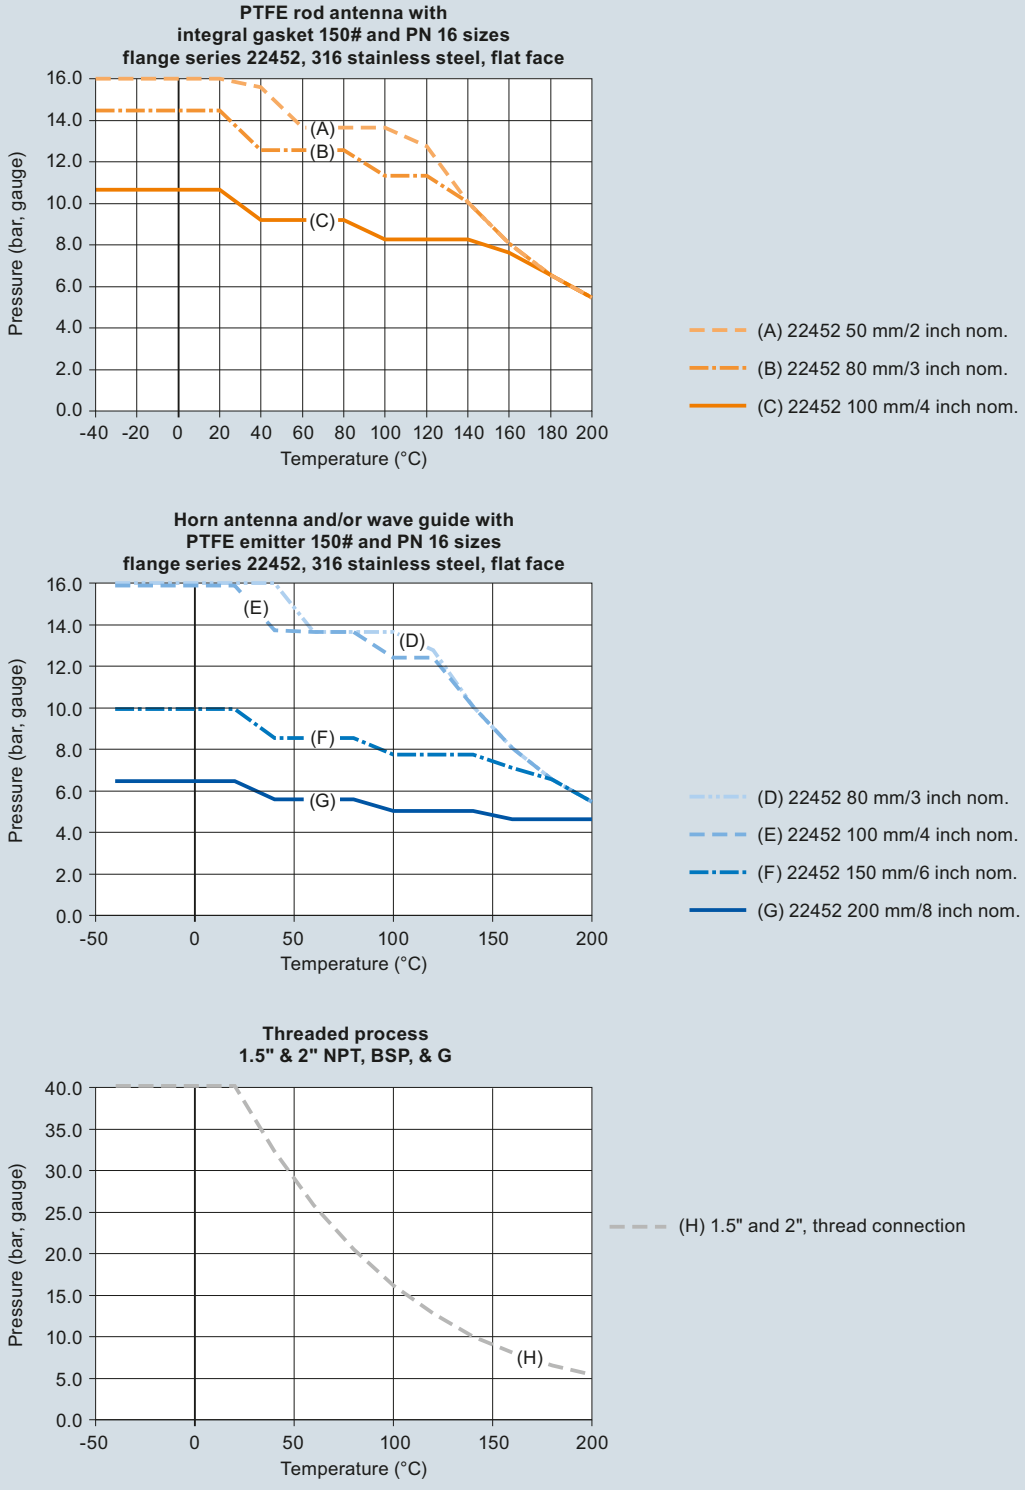

SITRANS LR200 process pressure/temperature derating curves

© Siemens AG 2017

Selection and ordering data

SITRANS LR200 Specials	Article No.
SITRANS LR200 PROFIBUS PA Aluminum Enclosure Kit with electronics and covers (7ML5422, 7ML5423, 7ML5424, 7ML5425), calibrated for use with standard rod antenna	
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option E, with PROFIBUS PA communication, no process connection.	**A5E01483420**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option A, with PROFIBUS PA communication, no process connection.	**A5E01483440**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, M20 cable inlet, approval option C, with PROFIBUS PA communication, no process connection.	**A5E01483456**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option C, with PROFIBUS PA communication, no process connection.	**A5E01483547**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option E, with PROFIBUS PA communication, no process connection.	**A5E01483559**
SITRANS LR200 HART aluminum enclosure kit with electronics and covers (7ML5422, 7ML5423, 7ML5424, 7ML5425), calibrated for use with standard rod antenna	
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection.	**A5E02956419**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option E, with HART communication start-up at < 3.6 mA, no process connection.	**A5E02956420**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option G, with HART communication start-up at < 3.6 mA, no process connection.	**A5E02956421**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option H, with HART communication start-up at < 3.6 mA, no process connection.	**A5E02956422**

SITRANS LR200 Specials	Article No.
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection.	**A5E03617085**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option B, with HART communication start-up at < 3.6 mA, no process connection.	**A5E03617086**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option C, with HART communication start-up at < 3.6 mA, no process connection.	**A5E03617087**
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option E, with HART communication start-up at < 3.6 mA, no process connection.	**A5E03617088**
Sun shield for SITRANS LR200 enclosure, stainless steel	
	A5E39142556
SITRANS LR200 Horn Antenna Kits with mounting screws (no emitter supplied)	
80 mm (3 inch) horn antenna kit	**PBD:25500K02A**
100 mm (4 inch) horn antenna kit	**PBD:25500K03A**
150 mm (6 inch) horn antenna kit	**PBD:25500K05A**
200 mm (8 inch) horn antenna kit	**PBD:25500K07A**
SITRANS LR200 Extension Kits for Horn Antenna with mounting screws	
100 mm (4 inch) extension kit for horn antenna	**PBD:25501K0100A**
150 mm (6 inch) extension kit for horn antenna	**PBD:25501K0150A**
200 mm (8 inch) extension kit for horn antenna	**PBD:25501K0200A**
250 mm (10 inch) extension kit for horn antenna	**PBD:25501K0250A**
500 mm (20 inch) extension kit for horn antenna	**PBD:25501K0500A**
1 000 mm (40 inch) extension kit for horn antenna	**PBD:25501K1000A**

© Siemens AG 2017

SITRANS LR200 Specials

SITRANS LR200 Specials

	Article No.
SITRANS LR200 Flanged Rod Antenna Kit with 316L stainless steel flat faced flanges	
Flanged PTFE rod antenna kit, 2" ASME, 150 lb. See drawing 51003 on http://www.siemens.com/radar [1)4)]	**PBD: 51003K020AAAA**
Flanged PTFE rod antenna kit, DN 50 PN 16. See drawing 51003 on http://www.siemens.com/radar [1)4)]	**PBD: 51003K050AJAA**
Flanged PTFE rod antenna kit, JIS 10K DN 50. See drawing 51003 on http://www.siemens.com/radar [1)4)]	**PBD: 51003K050AOAA**
SITRANS LR200 PTFE Rod Antenna Kit with 316L stainless steel 1½" pipe thread process connection	
PTFE rod antenna kit, 1½" NPT 316L stainless steel process connection, FKM O-ring; See drawing 51004 on http://www.siemens.com/radar [4)]	**PBD: 51004K1AAA**
PTFE rod antenna kit, R 1½" (BSPT), EN 10226 316L stainless steel process connection, FKM O-ring; see drawing 51004 on http://www.siemens.com/radar [4)]	**PBD: 51004K2AAA**
PTFE rod antenna kit, 1½" G 316L stainless steel process connection, FKM O-ring; see drawing 51004 on http://www.siemens.com/radar [4)]	**PBD: 51004K3AAA**
SITRANS LR200 PTFE Rod Antenna Kit with 316L stainless steel 2" pipe thread process connection	
PTFE rod antenna kit, 2" NPT 316L stainless steel process connection, FKM O-ring; see drawing 51005 on http://www.siemens.com/radar [4)]	**PBD: 51005K1AAA**
PTFE rod antenna kit, R 2" (BSPT), EN 10226 316L stainless steel process connection, FKM O-ring; see drawing 51005 on http://www.siemens.com/radar [4)]	**PBD: 51005K2AAA**
PTFE rod antenna kit, 2" G 316L stainless steel process connection, FKM O-ring; see drawing 51005 on http://www.siemens.com/radar [4)]	**PBD: 51005K3AAA**

SITRANS LR200 Specials

	Article No.
SITRANS LR200 PTFE Rod Antenna Kit (100 mm shield) with 316L stainless steel 2" pipe thread process connection	
PTFE rod antenna shielded kit, 2" NPT 316L stainless steel process connection, FKM O-ring, 100 mm 316L stainless steel shield. See drawing 51002 on http://www.siemens.com/radar [3)4)]	**PBD: 51002K0100AAA**
PTFE rod antenna shielded kit, R 2" (BSPT), EN 10226 316L stainless steel process connection, FKM O-ring, 100 mm 316L stainless steel shield. See drawing 51002 on http://www.siemens.com/radar [3)4)]	**PBD: 51002K0100BAA**
PTFE rod antenna shielded kit, 2" G 316L stainless steel process connection, FKM O-ring, 100 mm 316L stainless steel shield. See drawing 51002 on http://www.siemens.com/radar [3)4)]	**PBD: 51002K0100CAA**
SITRANS LR200 Horn Antenna Kit with 316L stainless steel flat faced flange, with PTFE emitter (without waveguide)	
Horn antenna kit, 2" ASME 316L stainless steel flange 3 inch horn, PTFE emitter [1)4)]	**PBD: 51006K020AAAA**
Horn antenna kit, 2" ASME 316L stainless steel flange 4 inch horn, PTFE emitter [1)2)]	**PBD: 51006K020AABA**
Horn antenna kit, 2" ASME 316L stainless steel flange 6 inch horn, PTFE emitter [1)2)]	**PBD: 51006K020AACA**
Horn antenna kit, 2" ASME 316L stainless steel flange 8 inch horn, PTFE emitter [1)2)]	**PBD: 51006K020AADA**
Horn antenna kit, DN 50 PN 16 316L stainless steel flange 80 mm horn, PTFE emitter [1)2)]	**PBD: 51006K050AJAA**
Horn antenna kit, DN 50 PN 16 316L stainless steel flange 100 mm horn, PTFE emitter [1)2)]	**PBD: 51006K050AJBA**
Horn antenna kit, DN 50 PN 16 316L stainless steel flange 150 mm horn, PTFE emitter [1)2)]	**PBD: 51006K050AJCA**
Horn antenna kit, DN 50 PN 16 316L stainless steel flange 200 mm horn, PTFE emitter [1)2)]	**PBD: 51006K050AJDA**

© Siemens AG 2017

SITRANS LR200 Specials	
	Article No.
SITRANS LR200 PTFE flanged rod antenna kit with 316L stainless steel shield and 316L stainless steel flat faced flange	
PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L stainless steel flange, 100 mm 316L stainless steel shield.[1)4)]	**PBD: 51014K0100AAA**
PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L stainless steel flange, 100 mm 316L stainless steel shield.[1)4)]	**PBD: 51014K0100EJA**
PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L stainless steel flange, 150 mm 316L stainless steel shield.[1)4)]	**PBD: 51014K0150AAA**
PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L stainless steel flange, 150 mm 316L stainless steel shield.[1)4)]	**PBD: 51014K0150EJA**
PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L stainless steel flange, 200 mm 316L stainless steel shield.[1)4)]	**PBD: 51014K0200AAA**
PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L stainless steel flange, 200 mm 316L stainless steel shield.[1)4)]	**PBD: 51014K0200EJA**
PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L stainless steel flange, 250 mm 316L stainless steel shield.[1)4)]	**PBD: 51014K0250AAA**
PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L stainless steel flange, 250 mm 316L stainless steel shield.[1)4)]	**PBD: 51014K0250EJA**
PTFE paste	
Kit, PTFE paste, tube, 250 ml	**PBD:51036065**
Cable gland	
One polymeric cable gland M20 x 1.5, rated -20 ... +80 °C (-4 ... +176 °F) for General Purpose and ATEX EEx e	**7ML1930-1AN**
One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART	**7ML1930-1AP**
One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA	**7ML1930-1AQ**
Ex-proof plugs	
Ex-proof plugs kit, 1/2" NPT, qty 5	**A5E39979991**
Ex-proof plugs kit, M20, qty 5	**A5E39979992**

1) Available in flange sizes including ASME, DIN and JIS. Please consult a local sales person for details.

2) Available with no pressure rating. Please consult a local sales person for details.

3) Available in other shield lengths. Please consult a local sales person for details.

4) Available with Pressure rating. Please consult a local sales person for details.

Customers interested in a custom designed device should consult a local sales person. For more information, please visit http://www.automation.siemens.com/aspa_app.