


## XPP-5422GMX


### X-Series Intrinsically Safe Permissible Dual-Light™ Flashlight w/ Dual Magnets

<b>MARKET APPLICATIONS</b>	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
<b>DESCRIPTION</b>	This Dual-Light™ Flashlight is cETLus, ATEX, and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. The XPP-5422GMX uses a CREE® LED rated at 210 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 187 meters. A 130 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provide momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Additionally, the integrated magnets located in the base of the handle and the pocket clip, provide for almost limitless hands-free usage. Power comes from 3 AA premium batteries (not included).
<b>CASE MATERIAL</b>	Engineered Polymer - Green
<b>DIMENSIONS</b>	Length: 7.2 inches (183 mm) • Head Diameter: 1.8 inches (46 mm) • Handle Diameter: 1.1 x 1.5 inches (28 x 38 mm)
<b>WEIGHT</b>	Weight: 6.9 oz. (196 g) with batteries installed
<b>LENS</b>	Unbreakable polycarbonate with scratch resistant coating
<b>LIGHT SOURCE</b>	Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime
<b>LIGHT OUTPUT</b>	Flashlight: 210 lumens, Floodlight: 130 lumens, Dual-Light: 285 lumens
<b>ON/OFF</b>	Dual Body Switch - Momentary or Constant-on Flashlight, Constant-on Floodlight
<b>RUN-TIME</b>	Flashlight: 14 hours, Floodlight: 20 hours, Dual-Light: 10 hours
<b>BATTERY</b>	3 Alkaline AA batteries (not included)
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• cETLus, ATEX, and IECEx listed Intrinsically Safe Permissible Flashlight – Floodlight – Dual-Light™</li> <li>• CREE® LED technology – 50,000 + hours LED life</li> <li>• Momentary or constant-on flashlight</li> <li>• Sharp focused flashlight beam for distance illumination</li> <li>• Unfocused wide-beam floodlight for close-up illumination</li> <li>• Dual-light (flashlight &amp; floodlight at same time) for maximum versatility</li> <li>• Powerful integrated magnets built into the base and pocket clip for multiple hands-free options</li> <li>• Engineered polymer housing w/ Non-slip grip</li> <li>• Dual body switches</li> <li>• Waterproof</li> <li>• Impact &amp; chemical resistant</li> <li>• Built-in pocket/belt clip</li> <li>• Includes removable lanyard</li> <li>• Requires 3 AA batteries</li> </ul>

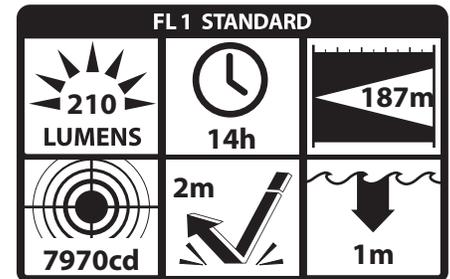

<b>WARRANTY</b>	Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.
-----------------	--

<b>APPROVALS</b>	
------------------	--

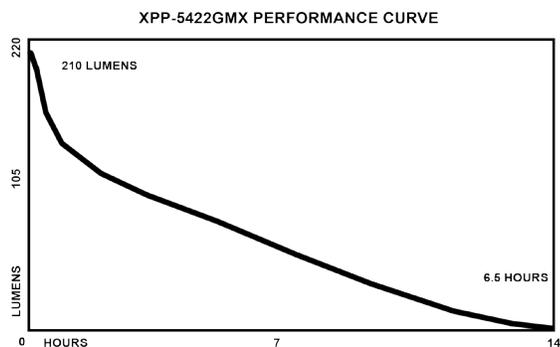

<b>Bayco Products, Inc. XPP-5422GMX</b>	
640 S. Sanden Blvd. Wylie, TX 75098	
ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	0359
Intertek CLASS I DIV 1 GRPS A-D T3 Ex ia op is I Ma CLASS II & III DIV 1 GRPS E-G T135C Ex ia op is IIC T3 Ga CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27837X CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ITS 16.0067X © I M 1 Ex ia op is I Ma -20°C ≤ Tamb ≤ +40°C © III 1 G Ex ia op is IIC T3 Ga 1.5V/Cell AA Alkaline	
<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26	<b>Certified to:</b> CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25
SEE INSTRUCTION MANUAL VOIR MANUEL	MFG MM-YY